

Mk1E Oil-filled Radiators



Technical Details						
Controls:	Digitally controlled, Electronic thermostat accurate to (±0.2°C) Timer modes: 7-day programmable user timer Continuous heat modes: Manual, Frost protect, Setback, Runback, Off					
Controller UI:	 Segmented display with white backlight Capacitive buttons with audio feedback User replaceable battery (Coin-Type) 					
Controller Functions:	 Open window detection, Adaptive-start, Advance time period Adjustable max SP range (7-32°C) Bluetooth for software updates 					
Construction:	Durable epoxy-polyester powder coated steel casing. Advanced controls with cap-sense technology for total flexibility of heating					
Element:	Compact, finned, mineral-filled sheathed type					
Installation:	Wall bracket set included for easy fixing					
Safety:	Auto reset thermal cut-outOverheat detection					
IP Rating	IP20					
Battery Backup:	3.3V coin cell battery, (Type CR2032) to backup real time clock. Battery life > 5 years					
Supply:	1.3 metres with fitted UK plug 1/N/PE ~230-240 V, 50Hz -Class I, with earth wire					
Colour / Finish:	Metal chassis, Air outlet grille and control moulding Traffic white (RAL 9016)					

Approvals and Guarantee						
Approvals:	ovals: BEAB Approved, UKCA and CE marked					
Guarantee:	2 Years					
Country of Origin:	United Kingdom					
Manufacturer:	Glen Dimplex Heating & Ventilation					


Product Description

Mk1E oil-filled radiators are suitable for both domestic and Commercial premises, providing a balance of convected and radiant heat, just like a conventional radiator. Now with additional software features such as 7-day timer and energy-saving adaptive start technology, this product

Key Features

- Oil filled for uniform heat distribution
- Epoxy-polyester powder coated steel casing
- Highly accurate electronic thermostat (± 0.2°C).
- Advanced controls with 7-day timer and optimum start
- Wall mounted with feet available as an accessory
- Complies with Lot 20 of ERP Directive

Dimensions

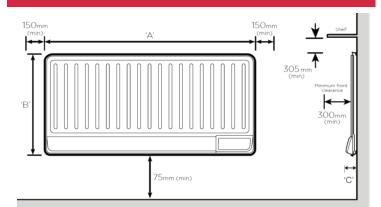

Model / Item No. (EAN Code = 5011139 + the item No.)	090584	B075E	090591	C100E	090607	D150E	090614	E200E		
Output (kW)	0.	0.75		1.00		1.50		2.00		
Width A (mm)	570		840		1105		1373			
Height B (mm)	659		659		659		659			
Depth C (mm)	70		70		70		70			
Weight (kg)	10.5		15		19.5		24			
Packaging Details										
Pack Width (mm)	710		980		1245		1515			
Pack Height (mm)	705		705		705		705			
Pack Depth (mm)	97		97		97		97			
Packed Weight (kg)	11.1		15.8		20.8		24.3			
Ti / Hi	14/2		12/2		14 / 1		14 / 1			
Pallet Qty (2.4m high)	28		24		14		14			