

Technical Details

Controls	Digitally controlled, Electronic Thermostat accurate to ($\pm 0.2^{\circ}\text{C}$) Timer modes: 7 Day Programmable User Timer Continuous heat modes: Manual, Frost Protect, Off, Setback Mode
Controller UI	<ul style="list-style-type: none"> Icon-based display with white backlight Capacitive buttons with audio feedback User replaceable battery (Coin-Type)
Controller Functions	<ul style="list-style-type: none"> Open window detection, Adaptive-start, Advance time period Adjustable max SP range ($7-32^{\circ}\text{C}$) Bluetooth for software updates Child Lock
Construction	<ul style="list-style-type: none"> Durable epoxy-polyester powder coated steel casing with slotted forward facing grille Advanced controls with cap-sense technology for total flexibility of heating
Element	Compact, finned, mineral filled sheathed element
Installation	1 H-frame wall bracket for easy fixing
Safety	<ul style="list-style-type: none"> Thermal cut-out. Auto reset type Overheat detection
IP Rating	IP24
Battery Backup	3.3V coin cell battery to backup real time clock. Battery life > 5 years.
Supply	1.3 metres fitted, 3 core for fused spur installation, 1/N/PE ~230-240 V, 50Hz Class I, with earth wire
Colour / Finish	Metal Chassis, Air Outlet Grille & Control Moulding - Traffic White (RAL 9016)

Warranty & Approvals

Approvals	CE, UKCA, BEAB
Warranty	2 Year
Country of Origin	United Kingdom
Manufacturer	Creda


Product Description

Creda TPRIIE features digital user controls, allowing the programming of 7-day timer profile via an icon-based display and capacitive buttons.

Key Features

- Intuitive user controls with icon-based display
- User programmable room temperatures with multiple seven-day timer profiles
- Electronic thermostat accurate to within 0.2°C
- Energy-saving technologies such as Adaptive Start, Open Window Detection and Frost Protect
- Slimline design that covers traditional panel heater fixing marks
- Forward facing slotted grille
- Splash-proof for use in bathrooms
- Complies with Lot 20 of ERP Directive

Dimensions

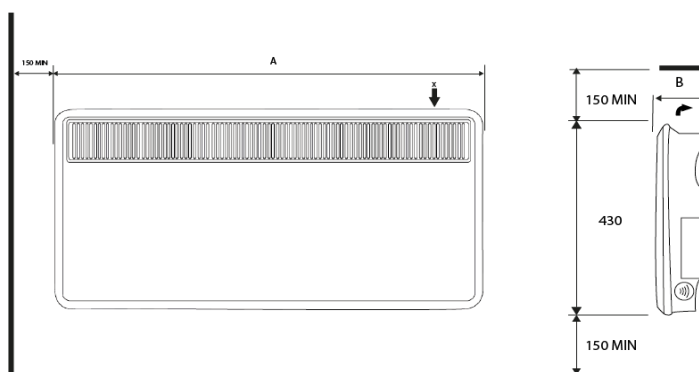

Model/Item No.(EAN-Code 5011139+Item No.)	090782	TPRII050E	090799	TPRII075E	091277	TPRII100E	090805	TPRII125E	090812	TPRII150E	TPRII200E	090829	TPRII300E	090836	TPRII300E
Output (kW)	0.50		0.75		1.00		1.25		1.50		2.00		3.00		
Height (mm)	430		430		430		430		430		430		430		
Width A (mm)	450		620		620		690		690		860		860		
Depth B (mm)	108		108		108		108		108		108		143		
Weight (Kg)	4.6		5.9		5.9		6.1		6.1		7.8		8.7		
Packaging Details															
Height (mm)	470		470		470		470		470		470		470		
Width (mm)	490		660		660		720		720		890		890		
Depth (mm)	135		135		135		135		135		135		160		
Packed Weight (Kg)	5.1		6.5		6.5		6.7		6.7		8.4		9.8		
Ti	17		12		12		10		10		9		7		
Hi	4		4		4		4		4		4		4		
Pallet Quantity (2.4m high)	68		48		48		40		40		36		28		