

# Contour Panel Heater (CEPE)



## Product Description

Creda CEPE features digital user controls, allowing the programming of 7-day timer profile via an icon-based display and capacitive buttons.

## Key Features

- Intuitive user controls with icon-based display
- User programmable room temperatures with multiple seven-day timer profiles
- Electronic thermostat accurate to within 0.2°C
- Energy-saving technologies such as Adaptive Start, Open Window Detection and Frost Protect
- Splash-proof for use in bathrooms
- Complies with Lot 20 of ERP Directive


## Technical Details

<b>Controls</b>	Digitally controlled, Electronic Thermostat accurate to ( $\pm 0.2^{\circ}\text{C}$ ) <b>Timer modes:</b> 7 Day Programmable User Timer <b>Continuous heat modes:</b> Manual, Frost Protect, Off, Setback Mode
<b>Controller UI</b>	<ul style="list-style-type: none"> <li>• Icon-based display with white backlight</li> <li>• Capacitive buttons with audio feedback</li> <li>• User replaceable battery (Coin-Type)</li> </ul>
<b>Controller Functions</b>	<ul style="list-style-type: none"> <li>• Open window detection, Adaptive-start,</li> <li>• Advance time period</li> <li>• Adjustable max SP range (<math>7\text{--}32^{\circ}\text{C}</math>)</li> <li>• Bluetooth for software updates</li> <li>• Child Lock</li> </ul>
<b>Construction</b>	<ul style="list-style-type: none"> <li>• Durable epoxy-polyester powder coated steel casing with slotted upward facing grille</li> <li>• Advanced controls with cap-sense technology for total flexibility of heating</li> </ul>
<b>Element</b>	Compact, finned, mineral filled sheathed element
<b>Installation</b>	1 H-frame wall bracket for easy fixing
<b>Safety</b>	<ul style="list-style-type: none"> <li>• Thermal cut-out. Auto reset type</li> <li>• Overheat detection</li> </ul>
<b>IP Rating</b>	IP24
<b>Battery Backup</b>	1 x CR2032 Lithium Manganese Dioxide 3V coin cell battery to backup real time clock (weight 3g). Battery life > 5 years.
<b>Supply</b>	1.3 metres fitted, 3 core for fused spur installation, 1/N/PE ~230-240 V, 50Hz Class I, with earth wire
<b>Colour / Finish</b>	Metal Chassis, Air Outlet Grille & Control Moulding - Traffic White (RAL 9016)

## Warranty & Approvals

<b>Approvals</b>	UKCA, CE
<b>Warranty</b>	1 Year
<b>Country of Origin</b>	United Kingdom
<b>Manufacturer</b>	Creda

## Dimensions

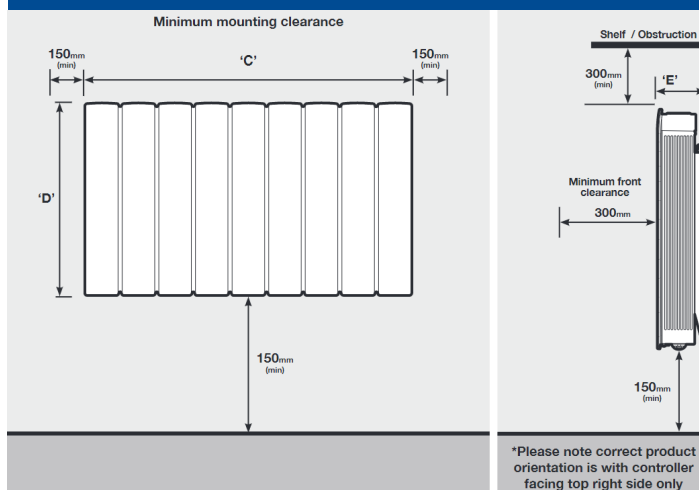

Model/Item No. (EAN-Code 5011139+Item No.)	091024	CEP050E	091031	CEP075E	091048	CEP100E	091055	CEP150E	091062	CEP200E
<b>Output (kW)</b>	0.50		0.75		1.00		1.50		2.00	
<b>Height 'D' (mm)</b>	536		536		536		536		536	
<b>Width 'C' (mm)</b>	503		503		671		741		911	
<b>Depth 'E' (mm)</b>	104		104		104		104		104	
<b>Weight (Kg)</b>	11.3		11.3		14		15.4		18.3	
<b>Packaging Details</b>										
<b>Height (mm)</b>	670		670		670		670		670	
<b>Width (mm)</b>	590		590		764		837		1000	
<b>Depth (mm)</b>	182		182		182		182		182	
<b>Packed Weight (Kg)</b>	13		13		16		17.5		20.5	
<b>Ti</b>	10		10		7		7		6	
<b>Hi</b>	3		3		2		2		2	
<b>Pallet Quantity (2.4m high)</b>	30		30		14		14		12	