

LST Low Surface Temperature Heater



Product Description

Advanced performance and controls. This low surface temperature panel heater meets the requirements of the NHS directive advising a maximum contact temperature of 43 degrees. This makes the unit safe for specification in schools, hospitals, public areas and other sensitive environments.


Key Features

- Electronic thermostatic control
- Touch-sensitive electronic control offering simple, extensive control of time and temperature
- Fanned heat for rapid warm up
- Quiet operation (just 35dB)
- Limited surface temperature

Technical Details

Power	500W, 750W, 1000W, 1500W
Thermostat Controls	7-32°C
Control Options	Two pre-set timer modes Holiday mode User timer Eco mode Frost protection
Thermostat	Electronic type, accurate to +/-0.2°C
Element	Sheathed, finned element
Colour / Finish	White / Steel
Battery	1 x CR2032 Lithium Manganese Dioxide 3V coin cell battery to backup real time clock (weight 3g). Battery life > 5 years.
IP Rating	IP24

Dimensions

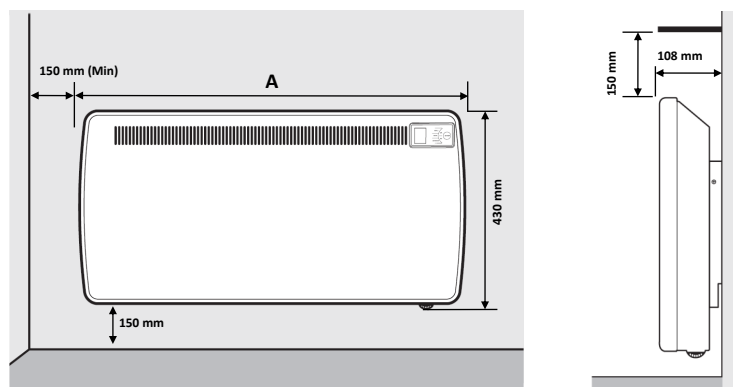

Model/Item No.(EAN-Code 5011139+Item No.)	054302	15T050	051011	15T075	051028	15T100	051035	15T150
Output (kW)	0.50		0.75		1.00			1.50
Height (mm)	430		430		430			430
Width 'A' (mm)	688		688		688			860
Depth (mm)	108		108		108			108
Weight (Kg)	7.1		7.1		8.7			9.4

Packaging Details

Height (mm)	495	495	495	495
Width (mm)	730	730	730	900
Depth (mm)	145	145	145	145
Packed Weight (Kg)	9.3	9.3	9.3	11.2
Ti	9	9	9	6
Hi	4	4	4	4
Pallet Quantity (2.4m high)	36	36	36	24

Warranty & Approvals

Approvals	NHS LST Directive, UKCA, CE, BEAB
Warranty	2 Years
Country of Origin	United Kingdom
Manufacturer	Glen Dimplex Heating & Ventilation (GDC Group Ltd)