



### Technical Details

|                             |  |
|-----------------------------|--|
| <b>Controls</b>             | Digitally controlled, Electronic Thermostat accurate to ( $\pm 0.2^{\circ}\text{C}$ )<br><b>Timer modes:</b><br>7 Day Programmable User Timer<br><b>Continuous heat modes:</b><br>Manual, Frost Protect, Off, Setback Mode |
| <b>Controller UI</b>        | •Icon-based display with white backlight<br>•Capacitive buttons with audio feedback<br>•User replaceable battery (Coin-Type)   |
| <b>Controller Functions</b> | •Open window detection, Adaptive-start,<br>•Advance time period<br>•Adjustable max SP range ( $7\text{-}32^{\circ}\text{C}$ )<br>•Bluetooth for software updates<br>•Child Lock  |
| <b>Construction</b>         | •Durable epoxy-polyester powder coated steel casing with slotted forward facing grille<br>•Advanced controls with cap-sense technology for total flexibility of heating  |
| <b>Element</b>              | Compact, finned, mineral filled sheathed element   |
| <b>Installation</b>         | 1 H-frame wall bracket for easy fixing   |
| <b>Safety</b>               | •Thermal cut-out. Auto reset type<br>•Overheat detection   |
| <b>IP Rating</b>            | IP24   |
| <b>Battery Backup</b>       | 1 x CR2032 Lithium Manganese Dioxide 3V coin cell battery to backup real time clock (weight 3g). Battery life > 5 years.   |
| <b>Supply</b>               | 1.3 metres fitted, 3 core for fused spur installation, 1/N/PE ~230-240 V, 50Hz Class I, with earth wire  |
| <b>Colour / Finish</b>      | Metal Chassis, Air Outlet Grille & Control Moulding - Traffic White (RAL 9016)   |

### Warranty & Approvals

|                          |                |
|--------------------------|----------------|
| <b>Approvals</b>         | CE, UKCA, BEAB |
| <b>Warranty</b>          | 2 Year         |
| <b>Country of Origin</b> | United Kingdom |
| <b>Manufacturer</b>      | Creda          |


### Product Description

Creda TPRIIE features digital user controls, allowing the programming of 7-day timer profile via an icon-based display and capacitive buttons.

### Key Features

- Intuitive user controls with icon-based display
- User programmable room temperatures with multiple seven-day timer profiles
- Electronic thermostat accurate to within  $0.2^{\circ}\text{C}$
- Energy-saving technologies such as Adaptive Start, Open Window Detection and Frost Protect
- Slimline design that covers traditional panel heater fixing marks
- Forward facing slotted grille
- Splash-proof for use in bathrooms
- Complies with Lot 20 of ERP Directive

### Dimensions

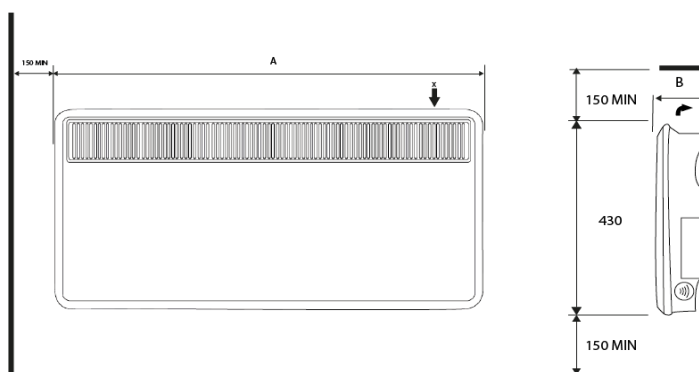

| Model/Item No.(EAN-Code 5011139+Item No.) | 090782 | TPRII050E | 090799 | TPRII075E | 091277 | TPRII100E | 090805 | TPRII125E | 090812 | TPRII150E | 090829 | TPRII200E | 090836 | TPRII300E |
|---|--------|-----------|--------|-----------|--------|-----------|--------|-----------|--------|-----------|--------|-----------|--------|-----------|
| <b>Output (kW)</b>                        | 0.50   |           | 0.75   |           | 1.00   |           | 1.25   |           | 1.50   |           | 2.00   |           | 3.00   |           |
| <b>Height (mm)</b>                        | 430    |           | 430    |           | 430    |           | 430    |           | 430    |           | 430    |           | 430    |           |
| <b>Width A (mm)</b>                       | 450    |           | 620    |           | 620    |           | 690    |           | 690    |           | 860    |           | 860    |           |
| <b>Depth B (mm)</b>                       | 108    |           | 108    |           | 108    |           | 108    |           | 108    |           | 108    |           | 143    |           |
| <b>Weight (Kg)</b>                        | 4.6    |           | 5.9    |           | 5.9    |           | 6.1    |           | 6.1    |           | 7.8    |           | 8.7    |           |
| <b>Packaging Details</b>                  |        |           |        |           |        |           |        |           |        |           |        |           |        |           |
| <b>Height (mm)</b>                        | 470    |           | 470    |           | 470    |           | 470    |           | 470    |           | 470    |           | 470    |           |
| <b>Width (mm)</b>                         | 490    |           | 660    |           | 660    |           | 720    |           | 720    |           | 890    |           | 890    |           |
| <b>Depth (mm)</b>                         | 135    |           | 135    |           | 135    |           | 135    |           | 135    |           | 135    |           | 160    |           |
| <b>Packed Weight (Kg)</b>                 | 5.1    |           | 6.5    |           | 6.5    |           | 6.7    |           | 6.7    |           | 8.4    |           | 9.8    |           |
| <b>Ti</b>                                 | 17     |           | 12     |           | 12     |           | 10     |           | 10     |           | 9      |           | 7      |           |
| <b>Hi</b>                                 | 4      |           | 4      |           | 4      |           | 4      |           | 4      |           | 4      |           | 4      |           |
| <b>Pallet Quantity (2.4m high)</b>        | 68     |           | 48     |           | 48     |           | 40     |           | 40     |           | 36     |           | 28     |           |