



GX6EC & GXC6EC

High performance window extract fans

Xpelair GX6EC models are purpose designed for use in kitchens and utility rooms. They can be window or panel mounted as supplied, or wall mounted using an optional wall kit. A trickle ventilation facility is available for background ventilation when not in use.


Both models are single speed and suitable for installation in single and double glazed windows. The fans have an EC motor which means that they operate at low power thus reducing running costs.

GX6EC has a silent Electro-thermal shutter whilst GXC6EC has an integral pullcord actuator.

Technical Details

	GX6EC 071262	GXC6EC 071279
No. of Speeds	1	1
Power (W)	9.5	6.8
Duct Size (mm)	184	184
Flow rate (l/s)	64	64
Flow rate (m3/h)	229	229
Noise dB(A)3m	34	34
IPX Rating	4	4
Motor Type	EC	EC
Silent electro-thermal actuation	✓	
Pullcord actuation		✓
Height (mm)	226	226
Width (mm)	210	210
Depth (mm)	155 - 186	155 - 186
Packed Weight (kg)	1.6	1.6
Packed Height (mm)	240	240
Packed Width (mm)	234	234
Packed Depth (mm)	170	170
Colour	White	White

Dimensions

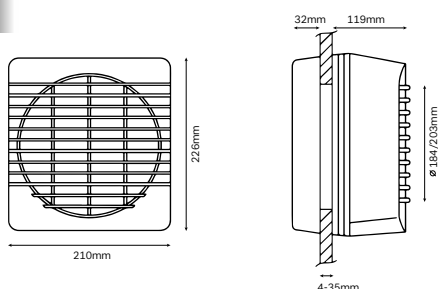

GX6EC & GXC6EC

Product type

High performance window extract fans

GX6EC Barcode
5011139071262

Country of origin
Ireland

GXC6EC Barcode
5011139071279

5 Year Guarantee