

Installation and Operating Instructions Ladder Towel Rail : CLR5C, CLR5W, CLR7C, CLR7W, CLR10C, CLR10W, CLR12C & CLR12W

Approved Intertek

08/53052/0 Issue 3 (UK) (IPX5)

THESE INSTRUCTIONS SHOULD BE READ CAREFULLY AND RETAINED FOR FUTURE REFERENCE

IMPORTANT SAFETY ADVICE

WARNING - THE SURFACE OF THIS RADIATOR CAN BE HOT.

In order to be effective the towel rail will get hot, however momentary contact with any part of it should not cause injury.

WARNING - In order to avoid a hazard for very young children, this appliance should be installed so that the lowest heated rail is at least 600mm above the floor.

WARNING - This appliance must not be located immediately above or below a fixed socket outlet or connection box.

IMPORTANT - If the towel rail is to be installed in a place used by the public, a warning notice should be placed adjacent to the rail advising that the surface can be hot.

CAUTION - This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.

Children of less than 3 years should be kept away unless continuously supervised. Children aged from 3 years and less than 8 years shall only switch on/off the appliance provided that it has been placed or installed in its intended normal operating position and they have been given supervision or instruction concerning the use of the appliance in a safe way and understand the hazards involved. Children aged from 3 years and less than 8 years shall not plug in, regulate and clean the appliance or perform user maintenance.

CAUTION - This appliance is not intended for use by children or other persons without assistance or supervision if their physical, sensory or mental capabilities prevent them from using it safely. Children should be supervised to ensure that they do not play with the appliance.

The towel rail is to be installed so that switches and other controls cannot be touched by a person in the bath or shower.

Precautions should be taken to ensure that prolonged contact with the towel rail cannot occur. Particular care should be taken in confined areas where accidental prolonged contact with the rail could be more likely to occur.

If the supply cord is damaged it must be replaced by the manufacturer or service agent or a similarly qualified person in order to avoid a hazard.

This appliance should only be used to dry fabrics washed in water using commonly available detergents.

A means for disconnection must be incorporated in the fixed wiring in accordance with the wiring rules.

CAUTION - Some parts of this product can become very hot and cause burns. Particular attention has to be given where children and vulnerable people are present.

WARNING - the towel rail is a sealed unit and is filled and sealed under controlled conditions. Under no circumstances should the seal of the unit be compromised.


General

This product is designed to heat and dry towels and is not capable of reaching and maintaining human thermal comfort. It is therefore out of scope of the Ecodesign Directive for local space heaters.

The towel rail is designed to provide an all year round service for airing towels and articles of clothing. It is not intended to provide a sole heating service, but will take the chill off a small size bathroom, lavatory or en suite.

No routine maintenance is necessary apart from occasional cleaning. The unit is splashproof to IPX5 standard.

Dimensions (millimetres)

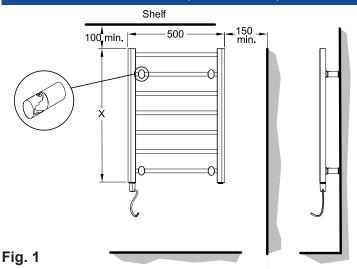

Model Specification

Model	Rails	Height (X) (mm) fig. 1	Power (W)	Weight (kg)	Finish
CLR5C	5	492	60	4.0	Chrome
CLR5W	5	492	100	4.0	White
CLR7C	7	692	80	5.4	Chrome
CLR7W	7	692	120	5.4	White
CLR10C	10	992	120	7.6	Chrome
CLR10W	10	992	175	7.6	White
CLR12C	12	1192	175	9.2	Chrome
CLR12W	12	1192	250	9.2	White

Electrical

WARNING: THIS APPLIANCE MUST BE EARTHED.

The electrical installation of this towel rail must be carried out by a competent electrician in accordance with the current I.E.E Regulations for Electrical Equipment. The towel rail is suitable for use on an A.C.~ electrical supply. Before installation check that the supply voltage corresponds with that marked on the rail.

IMPORTANT - The wires in the mains lead are coloured in accordance with the following code:

GREEN and YELLOW - EARTH

BLUE - NEUTRAL

BROWN - LIVE

As the colours of the wires in the mains lead of this appliance may not correspond with the coloured markings identifying the terminals in your plug, proceed as follows:

The wire which is coloured GREEN and YELLOW must be connected to the terminal in the plug which is marked with the letter ${\bf E}$ or by the earth

symbol $\stackrel{ ext{$ullet}}{=}$ or coloured green or green and yellow.

The wire which is coloured BLUE must be connected to the terminal which is marked with the letter N or coloured black.

The wire which is coloured BROWN must be connected to the terminal which is marked with the letter L or coloured red.

This appliance must only be used on A.C. mains supply of 230/240 Volts~.

Installation

If fitted in a room containing a bath or shower, to comply with the current I.E.E. Regulations, a cable outlet will be necessary with the supply to the heater controlled by a double-pole pull-cord switch having a contact separation of 3mm in each pole. The body of the switch should be situated as to be normally inaccessible to a person using a bath or shower. Alternatively the switch can be located outside of the bathroom.

IMPORTANT - Protect the electrical connection whilst handling the towel rail.


The towel rail must be permanently fixed to the wall using the wall brackets supplied. The rail must be mounted vertically as shown observing the minimum clearances stated.

WARNING: to ensure safe/ correct operation the rail must only be mounted vertically as shown in Fig. 1, observing the minimum clearances stated.

WARNING: The towel rail is heavy. Do not remove without seeking specialist advice.

Wall mounting


The wall mounting accessory pack contains the following:

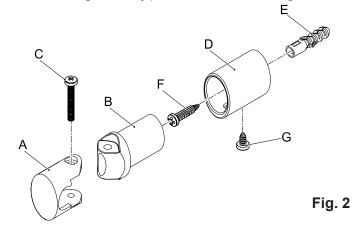

- (a) 4 mounting collars,
- (b) 4 Inner wall bracket sleeve,
- (c) 4 mounting collar screws,
- (d) 4 Outer wall bracket sleeve,
- (e) 4 wall plugs,
- (f) 4 wall mounting screws,
- (g) 4 Position locking screws,

Installation Procedure

Wall mounting dimensions:



Model	Y (mm)
CLR5	300
CLR7	500
CLR10	800
CLR12	1000

Fig. 3

1. Mark suitable mounting hole positions for the fixing brackets (ensuring they are horizontal) - see Fig. 3, ensure to allow enough room above and below to maintain the minimum clearance stated in Fig. 1.

2. Drill and plug (E) the wall to suit. Fix the outer wall bracket sleeve (D) to the wall using the screws provided (F). Ensure to align the bracket so that the fixing hole is accessible once the towel rail is fitted - see Fig. 4.




Fig. 4

Note: We recommend that the fixing hole is positioned horizontally, towards the side of the towel rail. This will allow easy access with a screw driver when fixing the rail in its final position.

3. Carefully assemble the four mounting collars (A) and inner bracket sleeve (B) to the towel rail and secure in the positions using the Mounting collar screws (C) as shown in Fig. 5. Do not fully tighten the screws as further adjustments may be required at a later stage. The brackets should be placed on the bottom and second from top rails and separated by a distance of approximately 360mm. Ensure the inner bracket sleeves are facing directly backwards.





Fig. 5

4. Lift the towel rail complete with the bracket assemblies and align with the outer bracket sleeves which were previously fixed to the wall. Insert the inner sleeve brackets into the outer sleeve brackets and fix in place using the position locking screws (G) - see Fig. 6. once this step is complete the Mounting collar screws (C) can be tightened.



Drying and Airing Towels

It is recommended that for efficient drying, no more than two layers of towels or similar fabric should be draped over the rail. Items should be placed evenly over the whole surface of the rail where possible.

It is not advisable to leave very damp towels or clothes on the towel rail when not in use, as this may in time, affect the paint finish.

The rail, although hot to the touch is not hot enough to scorch or burn fabrics. However, soap and detergents remaining in articles after washing can cause discolouration. Therefore care should be taken to thoroughly rinse articles before airing.

Operation (Electrical)

Heat will be distributed along each of the rails.

Some variation in the temperature across the surface of the rail is normal. When the appliance is covered the heating pattern of the rails may alter, and generally temperatures at the upper part of that rail will rise

The towel rail may be switched on and off at the isolating wall switch which must be positioned outside the bathroom, or operated by means of a pull cord switch.

A further means of control would be to link the towel rail to a room thermostat and/or timer. A room thermostat will ensure that the rail automatically switches off in warmer weather. A timer will allow for short periods of use.

Note: If the towel rail is located in a bathroom the adjustment for these controls must be located outside the bathroom.

Maintenance

There are no user serviceable parts on the towel rail.

The rail is filled with a precise quantity of special liquid and for electric only operation should never need draining or refilling. Repairs requiring the opening of the liquid-tight seal must only be made by the manufacturer's Service Agent. Any leakage must be reported to the manufacturer's Service Agent.

The element and cable are a single unit and any maintenance must be carried out by the manufacturers Service Agent using the recommended parts.

Cleaning

The finish on your towel rail can be maintained by occasionally wiping over with a damp cloth and lightly finishing with a soft dry cloth. This should only be carried out when the rail is cold. **Do not** use abrasive cleaning powders as this could damage the surface finish.

Your Guarantee



To view the full guarantee terms and conditions scan this QR code using your smartphone or go to https://www.gdhv.co.uk/guarantee-terms-and-conditions.

Your Product is manufactured by Glen Dimplex UK operating as Glen Dimplex Heating & Ventilation. GDHV designs and manufactures products to ensure they deliver reliable service for normal use in domestic dwellings and, where specified by us, in light commercial premises.

GDHV products are individually tested before leaving the factory, Your product comes with a 2 year parts and labour guarantee for repair or replacement of faulty goods and/or partial refund in the event that a repair or replacement is not available.

Your guarantee is provided by Glen Dimplex UK Ltd operating as Glen Dimplex Heating & Ventilation Ltd, Millbrook House, Grange Drive, Southampton SO30 2DF. Terms and conditions apply.

The GDHV guarantee does not in any way diminish or affect your statutory consumer rights in connection with your product.

If you experience a problem with your product during or after the guarantee period, visit our online help centre:

https://www.dimplex.co.uk/gdhv-help-centre

If you cannot solve your issue online, contact the customer care team on 0344 879 3588

Please note that when you contact us you will need to provide the model and serial number of your product and a description of the fault which has occurred.

Why Register Your Products With Us?



Faster Customer Service

Once you have registered your product, our customer service team will be able to quickly access your details when you contact us, allowing them to help you sooner



Guarantee Management

Upon registration, you will receive a confirmation email including a summary of your product guarantee, a copy of our terms and conditions and a copy of your proof of purchase (optional).



Product Recall Notification

If your product is registered you will automatically be contacted with applicable safety notifications, or in the unlikely event of a product recall.

Please register your product with us within 28 days of date of purchase to enable us to provide efficient customer service if you need to contact us, to contact you in the event of a product or safety update, to extend your guarantee where applicable, and, if you choose, to send you additional information about our products and services.

Register your product at https://www.gdhv.co.uk/register, or if you do not have access to the internet, call us on 0344 879 3588.

On registering you will automatically receive a copy of the terms and conditions of your guarantee, which can also be downloaded at any time from https://www.gdhv.co.uk/guarantee-terms-and-conditions. If you do not have access to the internet, call us on 0344 879 3588 and we will send them to you by post.

Recycling



For electrical products sold within the European Community. At the end of the electrical product's useful life it should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice in your country. Batteries should be disposed of or recycled in accordance with WEEE Directive 2012/19/EU. Packaging should be recycled where possible.



Customer Helpline: 0344 879 3588 www.credaheating.co.uk

Creda Heating Millbrook House, Grange Drive, Hedge End, Southampton, SO30 2DF



