



# C6

## 6" / 150mm Axial Extract Fans

The C6 intermittent extract fan range has been designed to blend seamlessly with the surround décor. These fans control humidity, mould growth and odours effectively in kitchens, utility rooms, larger bathrooms and offices.


The C6 range has 2 speeds, selectable at install and is suitable for wall and ceiling fitting. We recommend DX150 wallkit (93021AW) for wall installations. The kit includes a 300mm tube and external grille.

Models	Design	Timer (adjustable from 30s - 30mins)	Pullcord	Humidistat (50-90% RH)
<b>C6S</b>	93170AW	■		
<b>C6TS</b>	93172AW	■	✓	
<b>C6PS</b>	93174AW	■	✓	
<b>C6HTS</b>	93176AW	■	✓	✓

### Technical Details

	All Models
No. of Speeds	2
Power (W)	15 / 22
Duct Size (mm)	148
Flow rate (l/s)	60/62
Flow rate (m3/h)	216/225
Noise dB(A)3m	41/44
IPX Rating	4
Motor Type	AC
Height (mm)	228
Width (mm)	228
Depth (mm)	143
Colour	White

### Dimensions

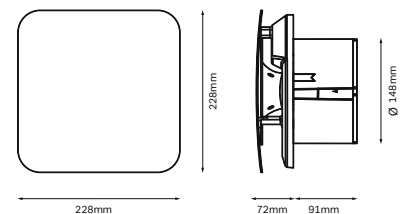

Country of Origin	Ireland
Guarantee Period	2 Years