



## FX20VEW / FX20WIPX4 Downflow Heater



### Technical Details

<b>Controls</b>	<ul style="list-style-type: none"> <li>Mandatory App Commissioning via ConfigR App upon installation.</li> <li>Manual operation via pull cord with run-back timer (run-back time configured via the ConfigR App), or trigger Advance if in Schedule (Auto) mode.</li> <li>Additional optional settings available via ConfigR App, which includes: Temperature control, 7 day timer, advance timer period and boost functionality.</li> <li>Digitally controlled, accurate electronic thermostat, adjustable (7-30°C) via App</li> </ul>
<b>Construction</b>	Durable insulated plastic case. Moulded in flame retardant self extinguishing grade nylon
<b>Element</b>	2kW stitched type with thermal fuse protection
<b>Installation</b>	Two upper keyhole slots are provided together with a third fixing hole to secure the heater to the wall. Supplied without cable
<b>Safety</b>	Each product is fitted with electrical reset cut-out
<b>Memory Backup</b>	Supercapacitor (3-4 days), stores time and date only.
<b>Supply</b>	3 core for fused spur installation 1/N/PE ~230-240 V 50 Hz—Class I ( <b>supply cable not included</b> )
<b>Colour / Finish</b>	White plastic case (RAL9016)

Material Code	400001840	400001850
Model	FX20VEW	FX20WIPX4
EAN	5011139089632	5011139089656
Output (kW)	1/2	1/2
Height (mm)	242	267
Width (mm)	229	252
Depth (mm)	109	132
Weight (kg)	1.1	1.4
IP Rating	IP22	IP24

#### Packaging Details

Height (mm)	260	275
Width (mm)	243	257
Depth (mm)	120	140
Packed Weight (kg)	1.5	2
Ti	40	31
Hi	8	5
Pallet Quantity (2.4m high)	320	155

### Product Description


The **FX20VEW** and **FX20WIPX4** fan heaters are designed to deliver fast, efficient warmth exactly where you need it. Mounted on the wall, these units direct heated air downward to quickly circulate warmth throughout the room. With flexible control via the **ConfigR app**, users or installers can easily set heating durations to suit any space or schedule.

Both models offer convenient **pull cord operation**, with advanced scheduling and temperature control features available through the app—giving you smart, responsive heating at your fingertips.


### Key Features

- Onboard Manual mode available after commissioning; pull cord operation
- Advanced settings via ConfigR App; User programmable temperatures with seven-day timer
- Thermal cutouts for fail-safe protection
- Same size and fixing points as previous Dimplex FX heaters
- Complies with Lot20 of ERP Directive 2025

### FX20VEW

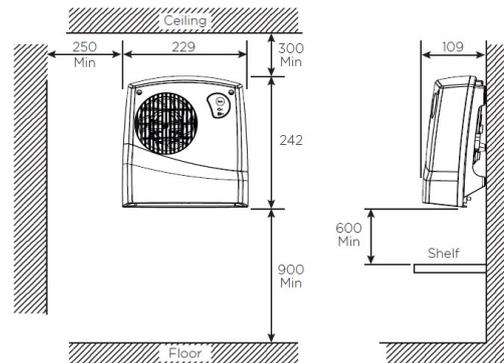

### FX20WIPX4

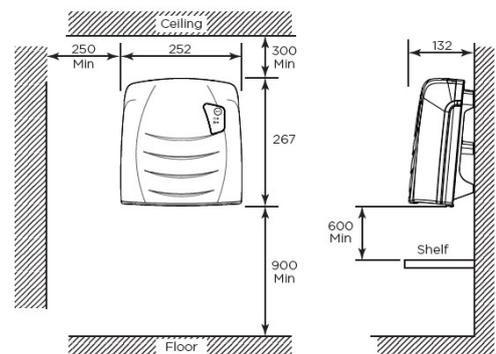

### Guarantee & Approvals

<b>Approvals</b>	CE, BEAB
<b>Guarantee</b>	2 Years (+1 when registered with 28 days of purchase)
<b>Country of Origin</b>	Northern Ireland
<b>Manufacturer</b>	Glen Dimplex UK Ltd