

Dimensions	H	W	D
(millimetres)	258	185	185

Model(s)	Specification
DXUC2B	2.0kw Switch & Thermostat



Fig. 1

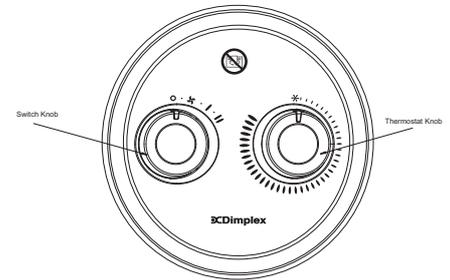


Fig. 2

IMPORTANT : THESE INSTRUCTIONS SHOULD BE READ CAREFULLY AND RETAINED FOR FUTURE REFERENCE

IMPORTANT SAFETY ADVICE

READ THESE INSTRUCTIONS BEFORE USE.

DO NOT use the heater on deep pile carpets or the long hair type of rugs, or less than 750mm (30") away from any overhanging surface. Keep combustible materials such as drapes and other furnishings clear from the front, sides and rear of the heater. Do not use heater to dry your laundry.

DO NOT use the heater in the immediate surroundings of a bath, a shower or a swimming pool.

DO NOT place the heater directly below a fixed socket outlet.

WARNING: In order to avoid overheating, do not cover the heater.

The socket-outlet must be accessible at all times to enable the mains plug to be disconnected as quickly as possible.

DO NOT COVER or obstruct in any way the air inlet slots in the top and bottom of the heater, or the air outlet slots at the front of the heater.

DO NOT operate the heater with the mains lead overhanging the front outlet grille.

Warning: In order to avoid a hazard due to inadvertent resetting of the thermal cutout, this appliance must not be supplied through an external switching device, such as a timer, or connected to a circuit that is regularly switched on and off by the utility.



THE HEATER CARRIES A WARNING SYMBOL INDICATING THAT IT MUST NOT BE COVERED.

The instruction leaflet belongs to the appliance and must be kept in a safe place. If changing owners, the leaflet must be surrendered to the new owner.

IMPORTANT: If the mains lead of this appliance is damaged, it must be replaced by the manufacturer or its service agent or a similarly qualified person in order to avoid a hazard.

This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience or knowledge if they have been given supervision or instruction concerning the use of the appliance in a safe way and understand the hazards involved. Cleaning and user maintenance shall not be made by children without supervision.

Children of less than 3 years should be kept away unless continuously supervised. Children aged from 3 years and less than 8 years shall only switch on/off the appliance provided that it has been placed or installed in its intended normal operating position and they have been given supervision or instruction concerning the use of the appliance in a safe way and understand the hazards involved. Children aged from 3 years and less than 8 years shall not plug in, regulate and clean the appliance or perform user maintenance.

CAUTION: Some parts of this product can become very hot and cause burns. Particular attention has to be given where children and vulnerable people are present.

Avoid use of an extension cord because the extension cord may overheat and cause risk of fire. The heater should always be used on a flat, stable surface.

Electrical connection

This heater must be used on an ~ supply only and the voltage marked on the heater must correspond to the supply voltage. This heater is fitted with a rewirable plug incorporating a 13 amp fuse. In the event of replacing the fuse in the plug supplied, a 13 amp fuse approved by ASTA to BS 1362 must be used. If any other type of plug is used, a 15 amp fuse must be fitted in the plug, the adaptor, or at the distribution board.

IMPORTANT : If the plug is not suitable for your socket, the 13 amp plug should be removed. Before wiring the appropriate plug, please note that the wires in this mains lead are coloured in accordance with the following code :

BLUE : NEUTRAL
BROWN : LIVE

As the colours of the wires in the mains lead may not correspond with the coloured markings in your plug, proceed as follows :

Connect the **BROWN** wire to the terminal marked 'L' or coloured **RED**. Connect the **BLUE** wire to the terminal marked 'N' or coloured **BLACK**. **Note :** 'L' or 'N' wire must not be connected to the EARTH terminal marked 'E' or '⊕' or coloured **GREEN** or **GREEN AND YELLOW**. If in doubt, consult your electrician.

Operation

Switch – see Fig. 2

With the selector switch, the fan can be switched on or the heat setting selected. The power indicating light illuminates when the Switch is turned on.

Thermostat – see Fig. 2

In order to maintain a certain room temperature, set the controller to 'max.'. Operate the appliance at full power until the required room temperature is reached. Set back the thermostatic controller until the appliance switches off with an audible 'click'. This temperature will be kept almost constant by the thermostatic control switching on and off automatically. Please note that the appliance can only be switched on when the thermostat setting is higher than the room temperature.

With the thermostat knob set to 'X' and the switch knob set to the required heating output the appliance switches on automatically when the temperature falls below +5°C ... +8°C.

Safety

Overheat Protection

For your safety, this appliance is fitted with a thermal cutout. In the event that the product overheats, the cutout switches the heater off automatically.

To bring the heater back into operation, remove the cause of the overheating, then unplug or turn off the electrical supply to the heater for a few minutes. When the heater has cooled sufficiently, re-connect and switch on the heater.

Fuselink

A thermal fuse link is provided as an added safety feature. If the fuse link operates and opens circuit it is the result of abnormal overheating within the appliance and servicing of the appliance by a competent service engineer will be required


in order to ensure the future safe operation of the heater. Customer services should be contacted, who will arrange the replacement of any faulty parts and the fitting of a new fuse link.

Cleaning

Switch off the appliance first and disconnect the plug from the socket! Clean the housing with a moist cloth, vacuum cleaner or brush. Do not use any abrasive or caustic cleaning agents! Do not use any flammable cleaning agents e.g. petrol or spirit for cleaning the appliance. Never immerse the appliance in water! **Danger to life!** Air inlet- and outlet area should be cleaned with a vacuum cleaner regularly. If the appliance is not used for extended periods, it must be protected against excessive dust and dirt.

This heater is provided with an air filter. Dust and fluff can accumulate in the filter and to avoid overheating of the element the filter should be cleaned when required. To clean the filter remove the filter bracket from the back of the heater. The filter can be taken from the filter bracket and dust or fluff can then be removed using a vacuum cleaner. When cleaning of the filter is complete the filter should be refitted to the filter bracket. The filter bracket should then be refitted to the rear of the product.

Recycling



For electrical products sold within the European Community. At the end of the electrical products useful life it should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice in your country.

After Sales Service

Your product is guaranteed for 3 years from the date of purchase. After sales information or assistance with this product can be found on our website:

www.dimplex.co.uk/support.

Your rights under this guarantee are additional to your statutory rights, which in turn are not affected by this guarantee.

Please do not return a faulty product to us as this may result in loss or damage and delay in providing you with a satisfactory service.

If after following these steps your product still does not operate you should return it to your point of purchase.

Please retain your receipt as proof of purchase.



The product complies with the European Safety Standards EN60335-2-30 and the European Standard Electromagnetic Compatibility (EMC) EN55014, EN60555-2 and EN60555-3 These cover the essential requirements of EEC Directives 2006/95/EC and 2004/108/EC