

# Xplus 2 EC & EC RF


Low-energy, multi-point domestic and commercial ventilation unit




Xplus 2 EC models boast all of the benefits that centralised extraction systems offer – like flexible siting, multiple spigot connections and high-performance extraction – plus the added benefit of long-life, energy-efficient EC motors with backward curved impellers. This allows these units to be configured at install to match the required Part F extraction rates for the size and layout of the dwelling, ensuring that high-quality indoor air is maintained throughout.



Systems

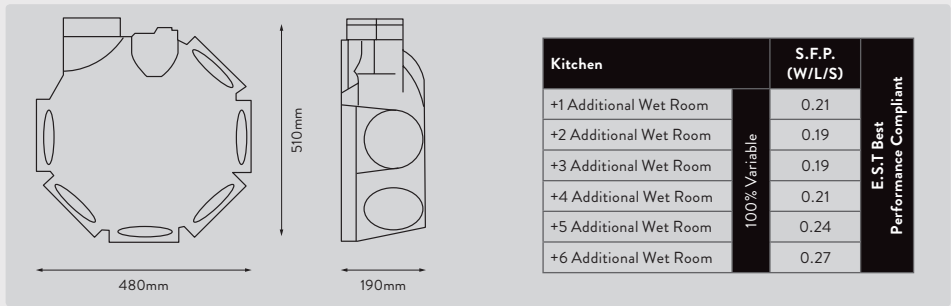


Product Features	Xplus 2 EC	Xplus 2 EC RF	Xplus 2 EC RFH
Reference Number	92498AG	92854AG	92795AG
Humidistat			✓
Trickle Ventilation Facility	✓	✓	✓
RF Controllable		✓	✓

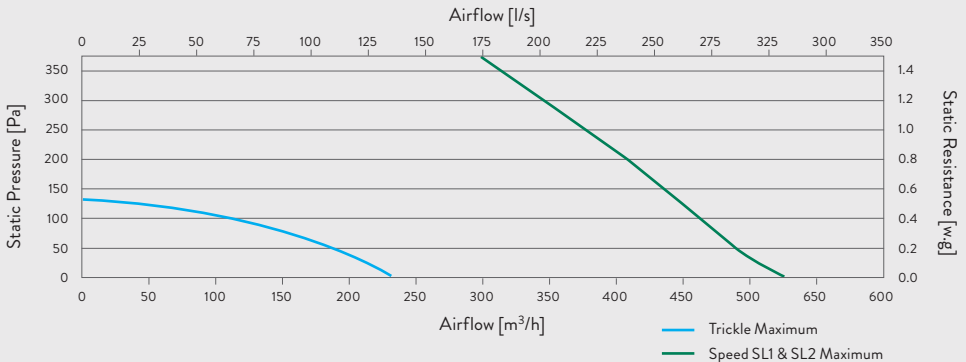

Product Selector	Xplus 2 EC	Xplus 2 EC RF	Xplus 2 EC RFH
Reference Number	92498AG	92854AG	92795AG
Motor Type	EC	EC	EC
Speeds	3 selectable	2 selectable	4 selectable
Maximum Extract Performance (FID, m <sup>3</sup> /h)	550 (fully adjustable)	550 (fully adjustable)	550 (fully adjustable)
Maximum Extract Performance (m <sup>3</sup> /h @100Pa)	465	465	465
Maximum Power (W)	79	79	79
Spigot Diameter (mm)	125	125	125
Sound Pressure Level (dBA@3m)	20/30/45	20/47	20/30/37/47
Weight (kg)	3.4	3.4	3.4
UK Guarantee (years)	5*	5*	5*

\*5 years on motor – 2 years on other parts.

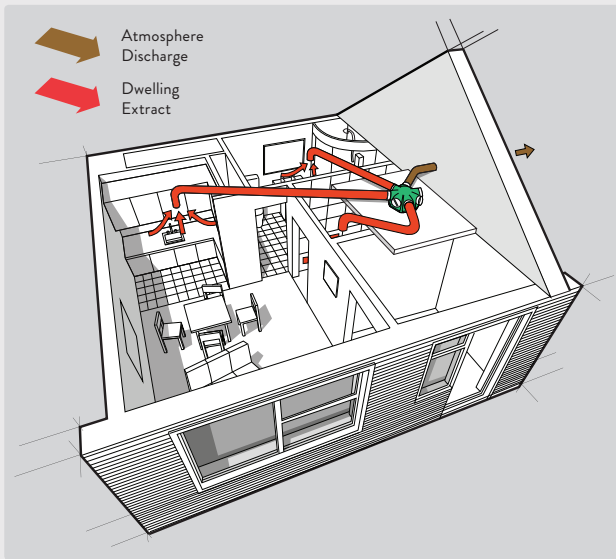

#### Performance

PA	Trickle Speed (full adjustable)	Med/High Speed (full adjustable)
0	240	550
25	215	520
50	195	490
75	162	480
100	122	465
125	50	450
150	.	440
175	.	425
200	.	410
225	.	400
250	.	380
275	.	360
300	.	350
325	.	330
350	.	320
375	.	305

#### ANCILLARIES

We recommend the Xplus 2 EC RF controllers to operate the fans wirelessly.

