

## **GX9 & GX12**


## Commercial AC window fans

GX9 and GX12 window fans have remained a byword for commercial window fans for over 40 years. Supplied with longer ladder strips for ease of installation and with a safety finger-guard integrated into the housing and the window grille. Plus, a tamper-proof positive plug and socket assembly provides a means of isolation for service access. Both 9" and 12" models are reversible and feature an enclosed external rotor motor providing constant volume outputs, even in gusty external conditions.

## **Key Features**

- · Electro-thermal shutter
- Single or double glazed window installation
- Window kit supplied
- · Safety finger guard
- · 2 year UK manufacturer guarantee



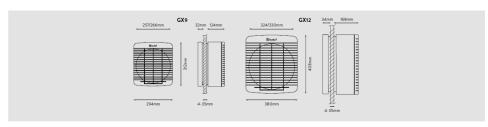

| Product Selector  Model |         | Standard | Pullcord | 9" Impeller | 12" Impeller | Reversible Intake/<br>Extract | Silent Electro-<br>thermal Shutter |
|-------------------------|---------|----------|----------|-------------|--------------|-------------------------------|------------------------------------|
|                         |         |          |          |             |              |                               |                                    |
| GXC9                    | 89995AW |          | 1        | 1           |              |                               |                                    |
| GX12                    | 90012AW | 1        |          |             | /            | /                             | /                                  |

| Product Selector |         | Remote Switch<br>(supplied<br>separately) | Selectable<br>Intake, Extract<br>or Controller<br>Operation | Extract<br>Performance<br>(m³/h) | Extract<br>Performance (I/s) | Intake<br>Performance<br>(m²/h) | Intake<br>Performance (I/s) |
|------------------|---------|---|---|----------------------------------|------------------------------|---------------------------------|-----------------------------|
| GX9              | 89994AW | 1   | 1   | 543/636                          | 151/177                      | 405/449                         | 113/125                     |
| GXC9             | 89995AW |   |   | 520                              | 145                          |                                 |                             |
| GX12             | 90012AW | 1   | /   | 1091/1546                        | 303/429                      | 772/1117                        | 215/310                     |

| Product Selector  Model |         | Speeds (2 speed<br>when used with a<br>FR22/30 controller) | Sound Pressure<br>Level (dBA@3m) | Electrical Power<br>Rating (W) | Hole Diameter<br>(mm) | Hole Diameter<br>with Wall Liner<br>(mm) | Weight (kg) |
|-------------------------|---------|--|----------------------------------|--------------------------------|-----------------------|--|-------------|
| GX9                     | 89994AW | 2  | 48/50                            | 41                             | 257                   | 266                                      | 4           |
| GXC9                    | 89995AW | 1  | 44                               | 32                             | 257                   | 266                                      | 3.9         |
| GX12                    | 90012AW | 2  | 50/55                            | 85                             | 324                   | 330                                      | 7.9         |