

NEW - Premier centrifugal fans

Centrifugal fans

The new universal Premier range of centrifugal extract fans is designed specifically for domestic application including toilets, bathrooms, utility rooms and kitchens where longer duct runs are required. Xpelair Premier offers social housing providers and installers a one-stop solution to accommodate many different property layouts.

For wall fitting we recommend the VK10 kit (89120AW) which includes wall tube and external grille.

Key Features

- Fan can be configured at installation for either intermittent (Building Regulation system 1) or continuous dMEV (Building Regulation system 3) running
- Gloss white casing with a clean and sleek appearance
- Low watt brushless DC motor for low cost operation
- Retrofittable to previous Xpelair Premier fan ranges
- Room selector to enable correct ventilation rates at install
- Datalogger to record fan's daily use
- Integral run-on timer, humidistat and pullcord to boost fan as required
- LVCF20TX model comes complete with transformer for safe operation in splash zone 1




Details	Product Selector	
	CF20TX	LVCF20TX
Part Number	067326	067333
Number of speeds	4	4
Duct size	100	100
IPX rating	IPX5	IPX5
Motor type	Brushless DC	Brushless DC
Pullcord	YES	YES
Timer (adjustable 30secs to 30 mins)	YES	YES
Humidistat (adjustable 50 to 90% RH)	YES	YES
Remote SELV Transformer	NO	YES
Colour/Material	White/ABS	White/ABS

Intermittent running: Toilet/Bath/Utility/Kitchen

Airflow (l/s)	8.5/17.5/34.5/61	8.5/17.5/34.5/61
Airflow (m³/hr)	30.5/63/124/219.5	30.5/63/124/219.5
Power (W)	4/6/13/29.8	4/6/13/29.8
Noise dB(A)3m	21/36/44/54	21/36/44/54

Continuous running

Airflow (l/s)	8.5/9.5/13/21	8.5/9.5/13/21
Airflow (m³/hr)	30.5/34/47/76	30.5/34/47/76
Power (W)	4/4/5/7	4/4/5/7
Noise dB(A)3m	21/28/27/37	21/28/27/37

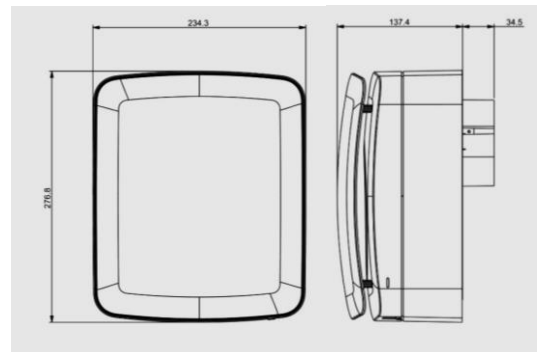

Accessory

XPAP Xpelair Premier adapter plate (111685)

For bridging the larger opening and enabling mounting alignment when replacing a previous Xpelair Premier DX400/CF40 series fan.

