



Simply Silent™ DX100TS

4" / 100mm axial bathroom fan with wall fitting kit

The Simply Silent™ DX100TS intermittent extract fan is designed for those looking for something conventional, with a modern twist. The fan controls humidity, odours and mould growth effectively in bathrooms, shower rooms, cloakrooms and toilets. DX100TS features a more traditional grille-style fascia, finished in cool white with a square fascia.


The product has two speeds, selectable at install, and features a wall-fitting kit. The product is suitable for wall, ceiling and window fitting (requires Simply Silent Window Kit).

DX100TS has an overrun timer which can be set at install between 30s and 30 minutes (the factory set point is 15 minutes). This means that the fan continues to operate for this time once the external switch (for example a lighting circuit) is turned off.

Technical Details

	DX100TS
No. of Speeds	2
Power (W)	6.0 / 6.7
Duct Size (mm)	100
Flow rate (l/s)	15/21
Flow rate (m3/h)	54/76
Noise dB(A) @ 3m	22/34
Specific Fan Power SFP (W/l/s)	0.40 / 0.32
IPX Rating	IPX4
Motor Type	AC
Pullcord	X
Timer (30s—30mins)	✓
Humidistat (50 to 90%)	X
Integral backdraught shutter	X
Height (mm)	178.5
Width (mm)	178.5
Depth (mm)	122.2
Packed Weight (kg)	1.2
Packed Height (mm)	187
Packed Width (mm)	210
Packed Depth (mm)	188
Colour	White

Dimensions

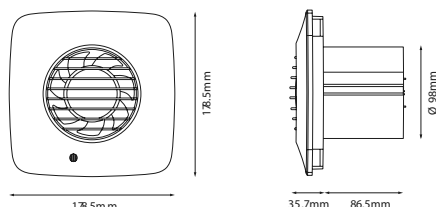

Simply Silent™ DX100TS

2 Year Guarantee

