

Bathroom Panel Heater (BPH)



Technical Details				
Element	Extruded aluminium plate element operated via an advanced controller equipped with seasonal adjustment to prevent room temperature overshoot			
Electrical con- nection	1.3m 3-core cable (live, neutral, earth) supplied fitted to each heater 230-240 V, 50 Hz			
Installation	Wall-mounted design for quick fixing installation			
Construction	Polyester powder coated steel or mirror front panel providing convection heat with a brushed aluminium towel rail			
Controls	Colour-changing graphical display showing current room temp. Intuitive 'splash-proof', CapSense buttons for easy control. Battery backup Electronic thermostat accurate to (±0.2oC)			
Timer modes	7-day timer Modes: Manual, User Timer, Out all day, Home all day, Holiday, Frost protect, Off,			
Functions	Open window detection, EcoStart, Setback			
Safety features	features Overheat detection, IP25, Thermal cut outs			
Colour / Finish	Metal or tinted Mirror			
Approvals	CE and BEAB			
Warranty	2 years			


Additional Information					
Model No.	Ti	Hi	Pallet Quantity (2.4m high)	Barcode	
BPH100G	5	3	15	5011139090546	
BPH100M	5	3	15	5011139090539	

Product Description

A stylish bathroom heater which provides high-comfort convected heat and towel warming radiant heat with the added convenience of rails for drying and airing towels.

Key Features

- 3 in 1 design for space heating with towel drying and airing facilities
- Splash proof to IP25 rating ideal for installation in bathrooms
- Available with a modern metal facia or tinted mirror effect with de-misting capability
- Convective element for fast and effective heat output compared to a towel rail
- Powerful 1kW output
- Advanced controls with cap-sense technology, graphical display for total flexibility of heating and highly accurate electronic thermostat (±0.2oC)
- LOT 20 compliant controls legal

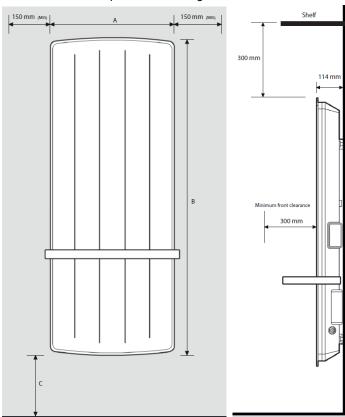

Dimensions						
Model No.	Output kW	Height (B) mm	Width (A) mm	Depth (C) mm	Weight KG	
BPH100G	1.0	1100	430	271	16.2	
BPH100M	1.0	1073	418	265	9.7	

Packaging Details						
Model No.	Length	Height	Depth	Weight KG		
BPH100G	1180mm	510mm	181mm	19		
BPH100M	1180mm	510mm	181mm	12		